

GASOLINE WATER PUMPS


HT10H₁ ENGINE:HT1E40F

PUMP	Suction/Discharge Port Dia 出口水径in	1"(25)
	Total Head 扬程 (m)	22
	Suction Head 吸程 (m)	7
	Max .Capacity 最大流量 (l/min)	130
ENGINE	Type 型式	Single Cylinder,2-Stroke
	Displacement 排量(ml)	43
SET	Rated Power Output 额定功率(kw/rpm)	1.25/6500
	Overall Dimension LXWXH 包装尺寸(mm)	320x300x330
	N.W/G.W(kg)	7.5/8.5
	20'FT	930



HT10H₂ ENGINE:HT136F

PUMP	Suction/Discharge Port Dia 出口水径in	1"(25)
	Total Head 扬程 (m)	22
	Suction Head 吸程 (m)	7
	Max .Capacity 最大流量 (l/min)	130
ENGINE	Type 型式	OHV,Single Cylinder,4-Stroke,Forced Air-Cooled
	Displacement 排量(ml)	31
SET	Rated Power Output 额定功率(kw/rpm)	0.85/7000
	Overall Dimension LXWXH 包装尺寸(mm)	320x275x365
	N.W/G.W(kg)	6.5/7.5
	20'FT	900

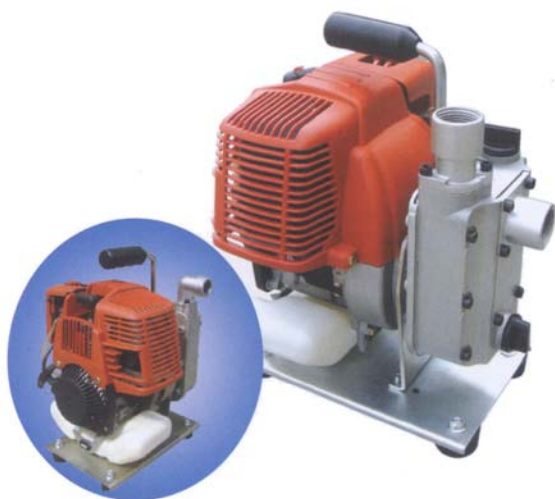

HT15H ENGINE:HT152F

PUMP	Suction/Discharge Port Dia 出口水径in	1.5"(40)
	Total Head 扬程 (m)	30
	Suction Head 吸程 (m)	7
	Max .Capacity 最大流量 (l/min)	400
ENGINE	Type 型式	OHV,Single Cylinder,4-Stroke,Forced Air-Cooled
	Displacement 排量(ml)	82
SET	Rated Power Output 额定功率(kw/rpm)	2.4/3600
	Overall Dimension LXWXH 包装尺寸(mm)	455x360x375
	N.W/G.W(kg)	16/18
	20'FT	485



GASOLINE WATER PUMPS



HTB20H ENGINE:HT168F

PUMP	Suction/Discharge Port Dia 出口水径in	2"(50)
	Total Head 扬程 (m)	36
	Suction Head 吸程 (m)	7
ENGINE SET	Max .Capacity最大流量 (l/min)	600
	Type型式	OHV,Single Cylinder,4-Stroke,Forced Air-Cooled
	Displacement 排量(ml)	163
	Rated Power Output 额定功率(kw/rpm)	5.5/3600
	Overall Dimension LXWXH包装尺寸(mm)	480x380x415
	N.W/G.W(kg)	23/25
	20'FT	365



HTB30H ENGINE:HT168F

PUMP	Suction/Discharge Port Dia 出口水径in	3"(80)
	Total Head 扬程 (m)	36
	Suction Head 吸程 (m)	7
ENGINE SET	Max .Capacity最大流量 (l/min)	1100
	Type型式	OHV,Single Cylinder,4-Stroke,Forced Air-Cooled
	Displacement 排量(ml)	163
	Rated Power Output 额定功率(kw/rpm)	5.5/3600
	Overall Dimension LXWXH包装尺寸(mm)	530x390x460
	N.W/G.W(kg)	26/28
	20'FT	315



HTB40H ENGINE:HT177F

PUMP	Suction/Discharge Port Dia 出口水径in	4"(100)
	Total Head 扬程 (m)	28
	Suction Head 吸程 (m)	9
ENGINE SET	Max .Capacity最大流量 (l/min)	1600
	Type型式	OHV,Single Cylinder,4-Stroke,Forced Air-Cooled
	Displacement 排量(ml)	27
	Rated Power Output 额定功率(kw/rpm)	9.0/3600
	Overall Dimension LXWXH包装尺寸(mm)	620x470x55
	N.W/G.W(kg)	46/48
	20'FT	168



HTB20H1 ENGINE:HT166F

PUMP	Suction/Discharge Port Dia 出口水径in	2"(50)
	Total Head 扬程 (m)	37
	Suction Head 吸程 (m)	7
ENGINE SET	Max .Capacity最大流量 (l/min)	600
	Type型式	OHV,Single Cylinder,4-Stroke,Forced Air-Cooled
	Displacement 排量(ml)	171
	Rated Power Output 额定功率(kw/rpm)	6.0/3600
	Overall Dimension LXWXH包装尺寸(mm)	550x410x460
	N.W/G.W(kg)	27/29
	20'FT	305

GASOLINE WATER PUMPS



HTB15G1 ENGINE:HT168F

PUMP	Suction/Discharge Port Dia 出口水径in	1.5"(40)
	Total Head 扬程 (m)	56
	Suction Head 吸程 (m)	8
	Max .Capacity最大流量 (l/min)	533
ENGINE	Type 型式	OHV,Single Cylinder,4-Stroke,Forced Air-Cooled
	Displacement 排量(ml)	163
SET	Rated Power Output 额定功率(kw/rpm)	5.5/3600
	Overall Dimension LXWXH包装尺寸(mm)	520x390x460
	N.W/G.W(kg)	25/27
	20'FT	315



HTB15G2 ENGINE:HT168F

PUMP	Suction/Discharge Port Dia 出口水径in	4.5"(40)
	Total Head 扬程 (m)	78
	Suction Head 吸程 (m)	2
	Max .Capacity最大流量 (l/min)	200
ENGINE	Type 型式	OHV,Single Cylinder,4-Stroke,Forced Air-Cooled
	Displacement 排量(ml)	163
SET	Rated Power Output 额定功率(kw/rpm)	5.5/3600
	Overall Dimension LXWXH包装尺寸(mm)	520x390x460
	N.W/G.W(kg)	28/29
	20'FT	315



HTB20H-W ENGINE:HT168F-2

PUMP	Suction/Discharge Port Dia 出口水径in	2"(50)
	Total Head 扬程 (m)	24
	Suction Head 吸程 (m)	7
	Max.Capacity最大流量 (l/min)	700
ENGINE	Type 型式	OHV,Single Cylinder,4-Stroke,Forced Air-Cooled
	Displacement 排量(ml)	196
SET	Rated Power Output 额定功率(kw/rpm)	6.5/3600
	Overall Dimension LXWXH包装尺寸(mm)	520x390x460
	N.W/G.W(kg)	27/29
	20'FT	305



HTB30H-W ENGINE:HT177F

PUMP	Suction/Discharge Port Dia 出口水径in	3"(80)
	Total Head 扬程 (m)	23
	Suction Head 吸程 (m)	7
	Max .Capacity最大流量 (l/min)	1200
ENGINE	Type 型式	OHV,Single Cylinder,4-Stroke,Forced Air-Cooled
	Displacement 排量(ml)	270
SET	Rated Power Output 额定功率(kw/rpm)	9.0/3600
	Overall Dimension LXWXH包装尺寸(mm)	620x475x550
	N.W/G.W(kg)	55/57
	20'FT	168